


Corrugated Vinyl Runners

Specification Sheet

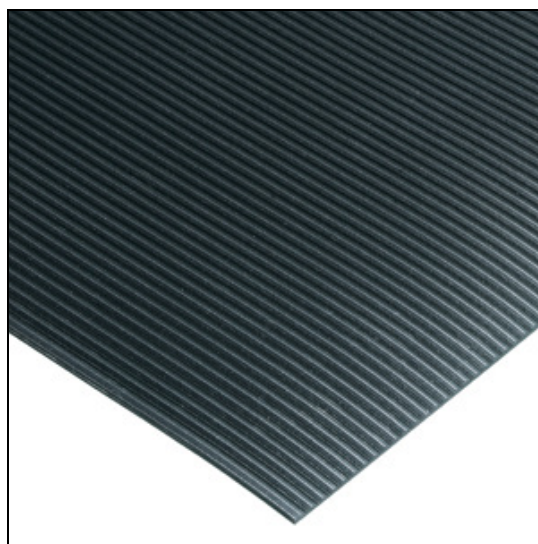

| | |
|--------------------------------|--|
| Performance | Best |
| Uses | Universal Indoor Applications |
| Compound | 100% Vinyl |
| Coefficient of Friction | 0.91 Dry / 0.65 Wet per ASTM F1677 |
| Tabor Abrasion | < 1% lost @ 1,000 cycles per Fed. Std. 191 |
| Flammability | "A" Rating per MVSS 302 |
| Warranty | 1 years |
| Compression | 100% Vinyl inches @ 35 PSI per ASTM D575 |
| Tensile Strength | 1000 lbs. per sq. inch per ASTM D412 |
| Wear Resistance | 4.5 |
| Slip Resistance | 4.5 |