


## Easy Clean Vinyl Runners

### Specification Sheet

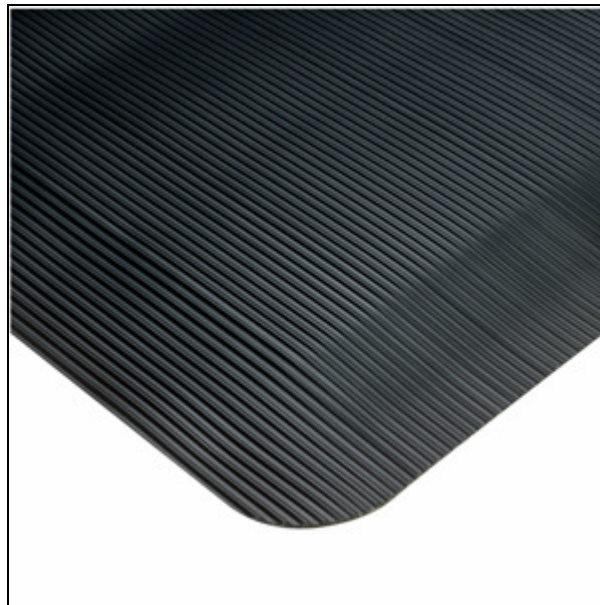

|                                |  |
|--------------------------------|--|
| <b>Performance</b>             | Good                                       |
| <b>Uses</b>                    | Universal Indoor Applications              |
| <b>Compound</b>                | 100% Vinyl                                 |
| <b>Coefficient of Friction</b> | 0.90 Dry / 0.62 Wet per ASTM F1677         |
| <b>Tabor Abrasion</b>          | < 1% lost @ 1,000 cycles per Fed. Std. 191 |
| <b>Flammability</b>            | "A" Rating per MVSS 302                    |
| <b>Warranty</b>                | 1 years                                    |
| <b>Compression</b>             | 100% Vinyl inches @ 35 PSI per ASTM D575   |
| <b>Tensile Strength</b>        | 1000 lbs. per sq. inch per ASTM D412       |
| <b>Wear Resistance</b>         | 4  |
| <b>Slip Resistance</b>         | 4  |